



SWS50-150W Series

50 to 150W, Single Output

General Purpose Power Supplies

- Low Cost
- Active Power Factor Correction - SWS 100 & 150
- Universal Input (85 - 265VAC)
- Input Transient Protected IEC61000-4
- DIN Rail Mounting Bracket Available

Key Market Segments & Applications

- | | |
|--------------------|--|
| Factory Automation | Process Control, NCMachining, Automotive, Packaging Equipment, Materials Handling, Chemical Processing, Robots |
| Test & Measurement | Burn-in & Test, Automated, Detection Test, Instrumentation, Measurement |
| Automated Service | Vending Machines, Elevators, Video Gaming, Point of Sale Equipment |

SWS50-150 Features and Benefits

Features

- Meets IEC61000-4
- Global Safety Approvals
- Power Factor Corrected
- Level B EMI

Benefits

- Greater Reliability
- Supports Global Use
- Supports Global Use
- Assists System Compliance

Specifications


MODEL		SWS50	SWS75	SWS100	SWS150
ITEMS					
Input Voltage range (1)	-	85 - 265VAC (47 - 63Hz) or 120 - 370VDC			
Inrush Current 115/230VAC	A	20/40 Ta=25°C Cold Start		16/32 Ta=25°C Cold Start	
Power Factor	-	Meets EN61000-3-2			
Input Current 115/230VAC	A	1.2/0.6	1.6/0.8	1.2/0.6	1.8/0.9
Temperature Coefficient	-	<0.02%/°C			
Overcurrent Protection	-	>105%, Constant Current Limit			
Overvoltage Protection	V	115 -135%, Cycle AC line to reset			
Hold Up Time (Typ) 115/230VAC	ms	20ms @ 115VAC			
Leakage Current (max) typ115/230VAC	mA	0.3mA/0.6mA		0.25mA/0.5mA	
Remote Sense	-	Not Available			
LED Indicator	-	Green LED = On			
Operating Temperature	-	-10 to +60°C (See table for derating - model specific)			
Storage Temperature	-	-30 to +85°C			
Operating Humidity (2)	-	30 - 90% RH			
Storage Humidity (2)	-	10 - 95% RH			
Cooling	-	Convection			
Withstand Voltage	-	Input to Ground 2kVAC, Input to Output 3kVAC, Output to Ground 500VAC for 1 min.			
Isolation Resistance	-	> 100MΩ at 25C & 70%RH, Output to Ground 500VDC			
Vibration (non operating)	-	19.6m/s ² (10 - 55Hz: constant sweep 1 min X, Y, Z for 1 hour)			
Shock	-	< 196.1 m/s ² (20G)			
Safety Agency Approvals	-	UL60950-1, EN60950-1, IEC60950-1, CE Mark, EN50178			
Conducted & Radiated EMI	-	EN55011 / EN55022-B, FCC Class B, VCCI-B			
Immunity	-	EN61000-4-2,-3,-4,-5,-6,-8,-11			
Weight	g	400	480	600	750
Size (WxHxD)	mm	92 x 37 x 159	94 x 43 x 170	96 x 45 x 188	99 x 51 x 198
Warranty	-	Two Years			

(1) Derate to 85% load below 100VAC input
 (2) non condensing


Model Selector								
Model	Voltage	Adjust Range	Max Curr. A	Load Reg mV	Line Reg mV	Ripple Noise mV	Eff. (typ)%	
SWS50-3	3.3V	3-3.6V	10	40	20	80	73/70	
SWS75-3	3.3V	3-3.6V	15	40	20	80	72/68	
SWS100-3	3.3V	3-3.6V	20	40	20	100	69/70	
SWS150-3	3.3V	3-3.6V	30	40	20	100	70/72	
SWS50-5	5V	4.5-5.5V	10	50	20	80	77/75	
SWS75-5	5V	4.5-5.5V	15	50	20	80	77/74	
SWS100-5	5V	4.5-5.5V	20	40	20	100	75/77	
SWS150-5	5V	4.5-5.5V	30	40	20	100	76/78	
SWS50-12	12V	10.8-13.2V	4.3	96	48	80	82/79	
SWS75-12	12V	10.8-13.2V	6.3	96	48	80	83/81	
SWS100-12	12V	10.8-13.2V	8.5	96	48	100	79/81	
SWS150-12	12V	10.8-13.2V	12.5	96	48	100	79/82	
SWS50-15	15V	13.5-16.5V	3.5	120	60	100	84/80	
SWS75-15	15V	13.5-16.5V	5	120	60	100	85/82	
SWS100-15	15V	13.5-16.5V	6.7	120	60	100	81/83	
SWS150-15	15V	13.5-16.5V	10	120	60	100	81/83	
SWS150-18	18V	16.2-19.8V	8.4	144	72	120	82/84	
SWS50-24	24V	21.6-26.4V	2.1	144	96	100	84/80	
SWS75-24	24V	21.6-26.4V	3.2	144	96	100	85/82	
SWS100-24	24V	21.6-26.4V	4.3	144	96	150	82/84	
SWS150-24	24V	21.6-26.4V	6.3	144	96	150	82/85	
SWS150-28	28V	25.2-30.8V	5.4	168	112	80	82/85	
Vertical Mount Convection	25°C	30°C	35°C	40°C	45°C	50°C	55°C	60°C
SWS50	100%	100%	100%	100%	100%	100%	93%	85%
SWS75 (3.3 - 5V)	100%	100%	100%	100%	93%	85%	73%	60%
SWS75 (12V - 24V)	100%	100%	100%	100%	100%	93%	85%	60%
SWS100	100%	100%	100%	100%	100%	87%	73%	60%
SWS150 (3.3 - 5V)	100%	95%	90%	85%	73%	60%	-	-
SWS150 (12V - 24V)	100%	100%	100%	100%	100%	100%	80%	60%
1.2m/s Forced Air	50°C	55°C	60°C	65°C	70°C			
SWS75	100%	100%	90%	80%	70%			
SWS100	100%	100%	90%	80%	70%			
SWS150	100%	100%	90%	80%	70%			

Derate to 80% load from 0 to -10°C


SWS50 Outline Drawing

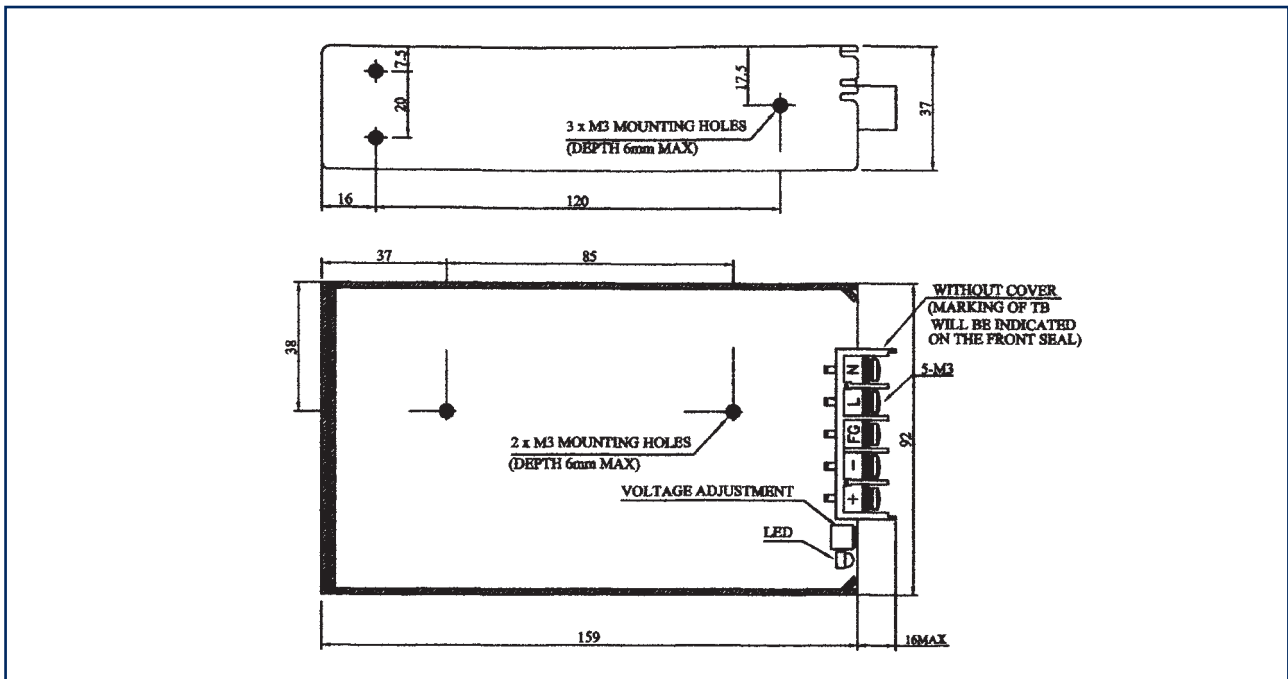


SWS75 Outline Drawing

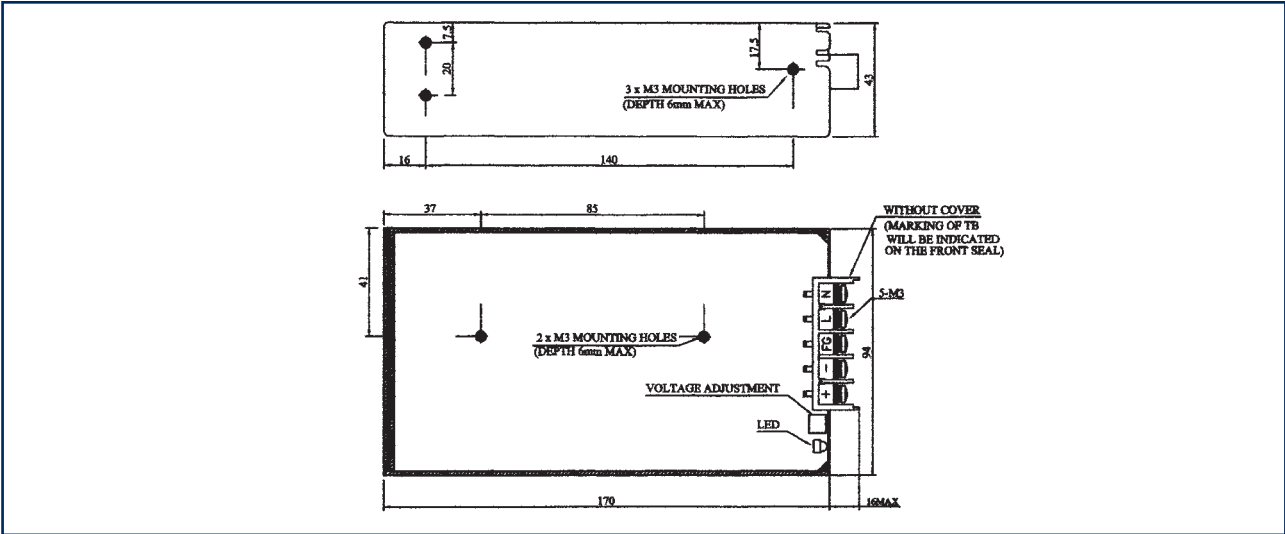

SWS100 Outline Drawing

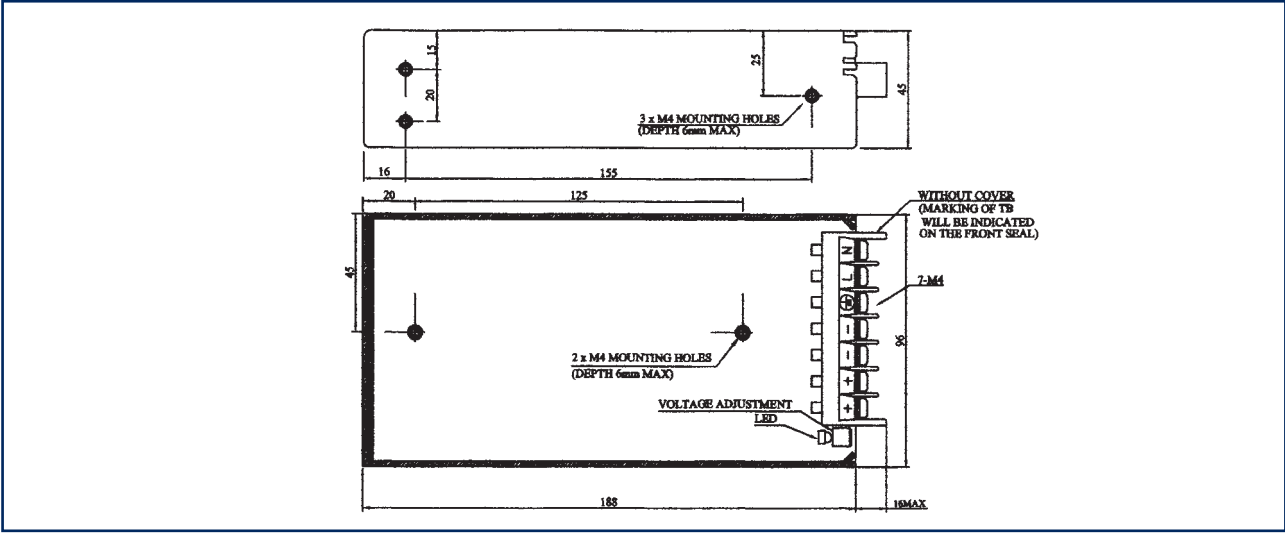

SWS150 Outline Drawing

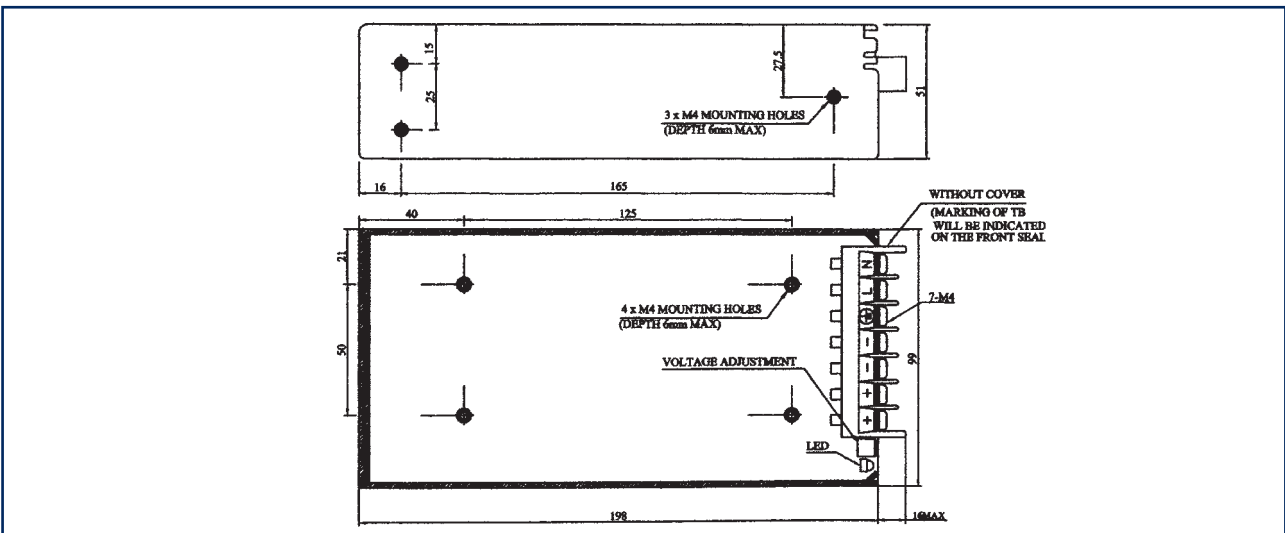

LAMBDA EUROPE

AUSTRIA

LAMBDA ELECTRONICS GmbH
Aredstraße 22
A-2544 Leobersdorf

Telephone: +43 (0) 2256 655 84
Facsimile: +43 (0) 2256 645 12
www.lambda-austria.com

FRANCE

LAMBDA SAS
ZAC des Delaches, BP1077 - Gometz le Chatel
91940 Les Ulis

Telephone: +33 (0) 1 60 12 71 65
Facsimile: +33 (0) 1 60 12 71 66
Web: www.lambda-f.com

GERMANY

LAMBDA GmbH
Karl-Bold-Straße 40
D-77855 Achern

Telephone: +49 (0) 78 41 666 0
Facsimile: +49 (0) 78 41 5000
Web: www.lambda-germany.com

ISRAEL

NEMIC LAMBDA LTD
Kibbutz Givat
Hashlosa 48800

Telephone: +972 (0) 3 902 4333
Facsimile: +972 (0) 3 902 4777
Web: www.nemic.co.il

ITALY

LAMBDA s.r.l.
Via dei Laboratori 128/130,
20092, Cinisello Balsamo (Mi)

Telephone: +39 (0) 02 61 29 38 63
Facsimile: +39 (0) 02 61 29 09 00
Web: www.lambda-italy.com

SWEDEN

LAMBDA SCANDINAVIA
PO Box 546, Rallarvägen 41
SE-184 25. Akersberga

Telephone: +46 (0) 8 598 94 090
Facsimile: +46 (0) 8 540 66 096
Web: www.lambda-scandinavia.com

UK

LAMBDA UK
Kingsley Avenue
Ilfracombe Devon EX34 8ES

Telephone: +44 (0) 1271 856666
Facsimile: +44 (0) 1271 864894
Web: www.lambda-gb.com

LAMBDA NORTH AMERICA

visit www.lambdapower.com for a list of Lambda offices and distributors

LAMBDA ASIA

visit www.densei-lambda.com for a list of Lambda offices and distributors

LOCAL DISTRIBUTION

